

VANDALPROOF METAL CABINET LOUDSPEAKER WITH LED STROBE



SENTRY6/STCL



INSTALLATION INSTRUCTIONS

STEP 1

You can cable this unit through the 1 x 20mm cable entry within the back of the unit or by the 2 x 20mm gland entry's provided.

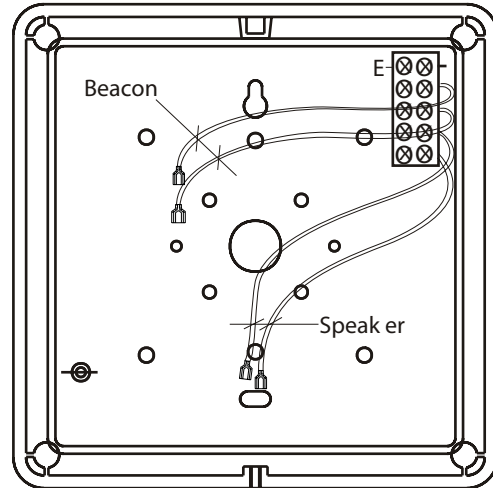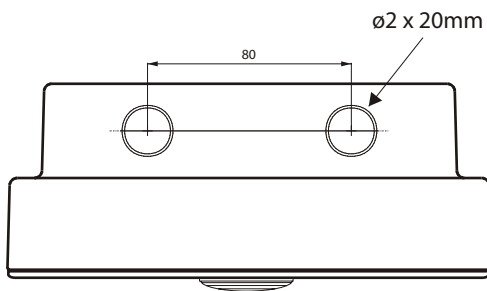

STEP 2

Once the cables come through the back box terminate to the terminal block.

STEP 3


Connect the speaker flying leads to the speaker unit and select the required power. Also connect the Beacon flying leads to the Beacon terminations.

STEP 4

Slot the speaker location plate under the retaining lug "A" and position the front plate square into the back box.


STEP 5

Tighten the Grub Screw "B" to secure the speaker into the enclosure.

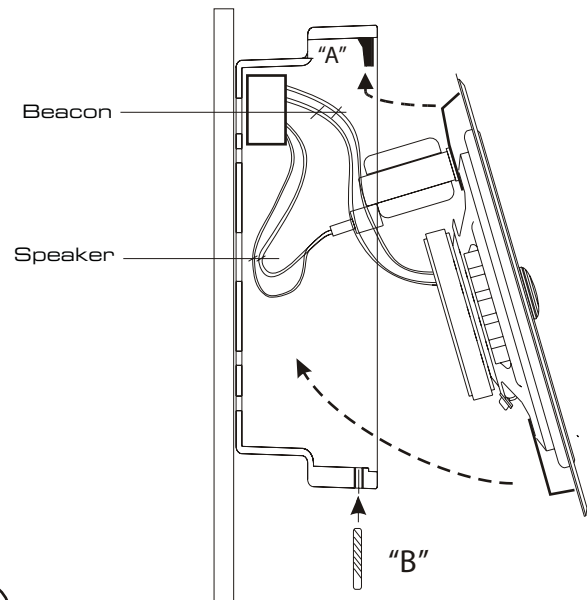

SENTRY6/STCL

Circuit diagram 100V Common

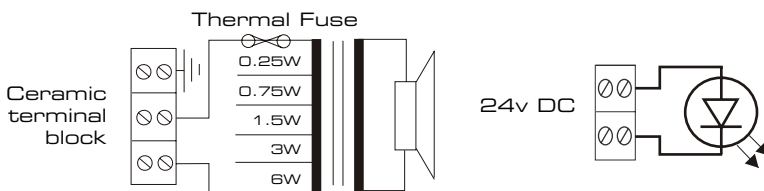

Penton UK Ltd

Unit 2 Teville Industrials | Dominion Way | Worthing | West Sussex | BN14 8NW
T: +44 (0)1903 215315 | F: +44(0)1903 215415 | E: sales@pentonuk.co.uk

www.pentonuk.co.uk

NOVEMBER 2011



RoHS

