


NSM

Controller Devices

NSM / Sensing microphone

The NSM assures the omnidirectional sound recording and pre amplification of the surrounding background noise. The 0 dB modulation is sent through the UAPG2 / LAPG2 in order to provide the automatic gain control feature of the A.N.G (Auto Noise Gain) component and allows the level adjustment where the NSM is implemented.

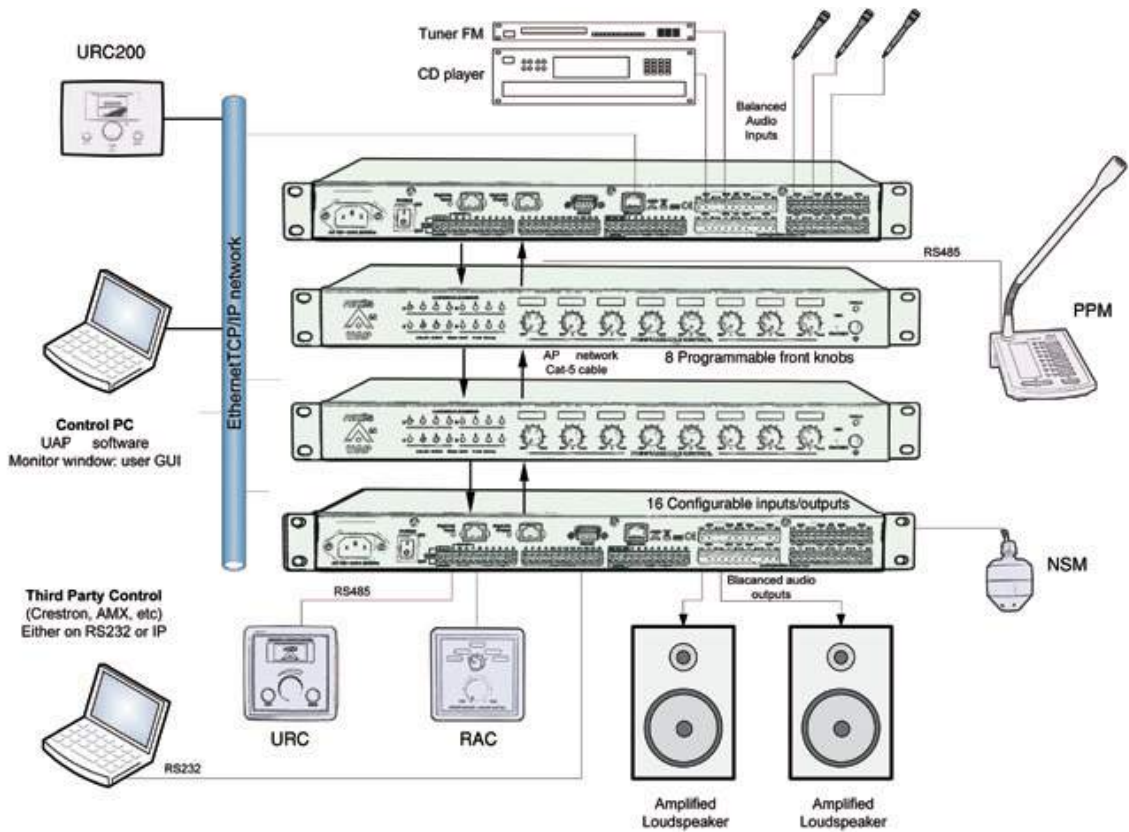

Typical example with UAPG2 DSP audio matrix System